

DIY- Installation Process

1 Structure for nine nos of solar panels on ground /rooftop to be fixed with proper anchoring .

Fixing of washers, nut and bolt of structure and placing of solar panel on structure table.

2

3 UV protected 1 core 4sqmm copper cable with Mc-4 to be used for termination.

Attach nine solar panels in series and measure voltage which should be 350v to 450v.

4

5 Fix the TAG Ultima on the wall and terminate it with load point

Change over switch to be fixed at load point.

6

7 Switch ON/OFF with remote and start enjoying free electricity.



Quality Checked and Marketed by:
TESLA POWER USA INC.
#1003-4-5, Tower-1, DLF Corporate Greens
Sector 74A, Gurugram, Haryana-122004
Web: www.teslapowerusa.in
Email: complaint@teslapowerusa.com

Manufacture By:

ALL ABOUT TECHNOLOGY LLP
F-40/41, Kartarpura industrial area,
22 godown, Jaipur-302005
Email: info@aatgroup.in

Channel Partner/Dealer



**TAG BHARAT
ULTIMA**

ELECTRICITY




**HEAVY Bill
to
ZERO Bill**



GO SOLAR

**1st time In India | Self Installation
500+ Service Centre | Lifetime Warranty**

Realtime Use

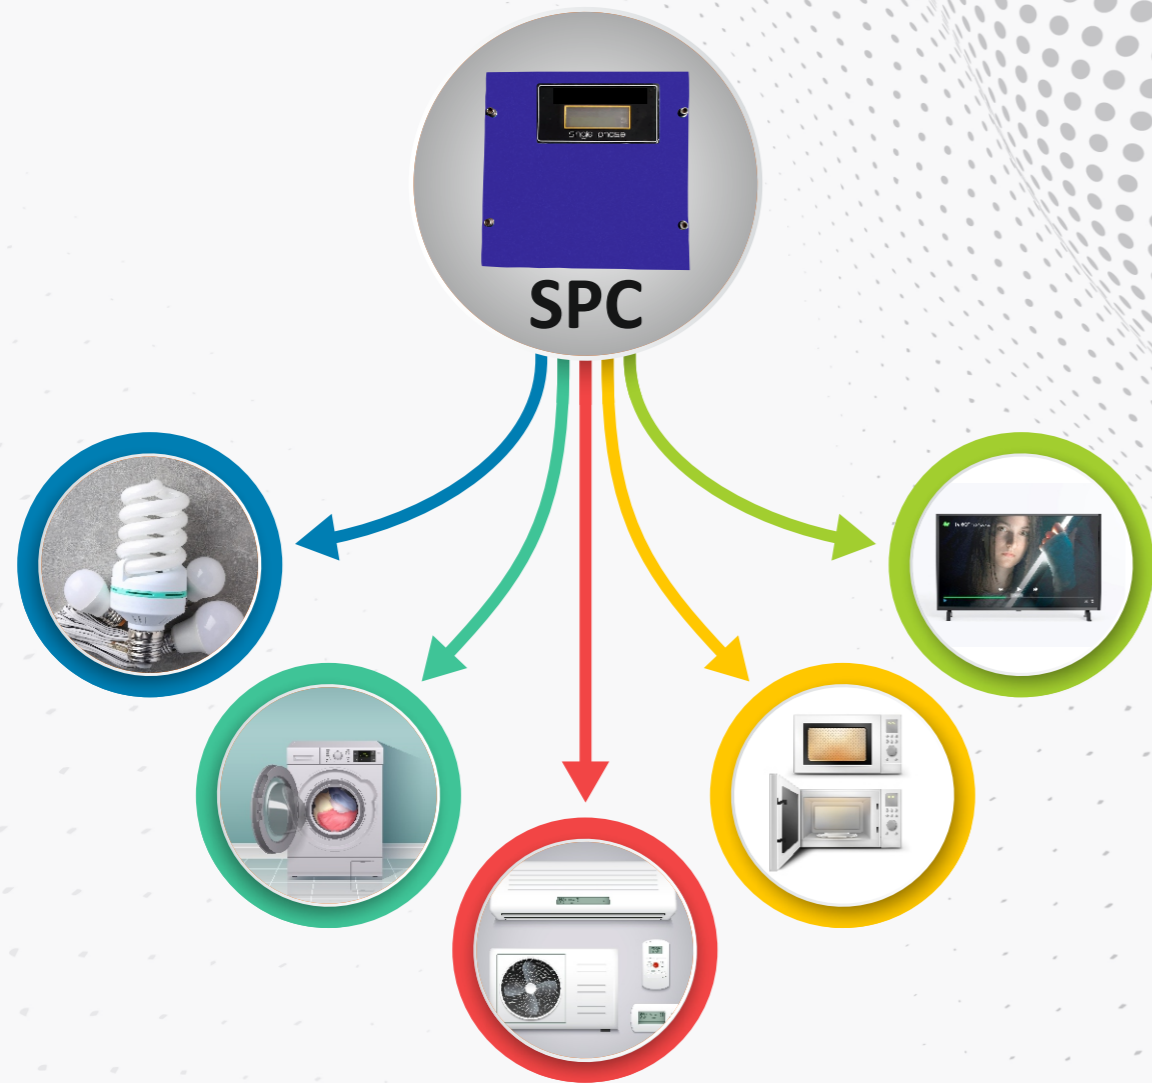

- AC ● Refrigerator ● Washing Machine
- Induction and many more

List Of appliances in 2BHK home that run on TAG Ultima*

Description	Watt
Air Conditioner (1 Unit)	750
Fan 200watt (1 Unit)	200
LED CFL 15 watt (1 Unit)	15
Refrigerator (1 Unit)	250
Washing Machine (1 Unit)	500
Induction Heating Plate (1 Unit)	1000
Water Pump (1 Unit)	500

MIX YOUR USE UPTO 1600 WATT*

AC +2 Fan +4 lights+ Refrigerator	Water pump+ 4Fans+4 lights+ Refrigerator
Laptop+ Printer+ 6Fans+Refrigerator	Induction Plate+ 4 Fans +5 lights
Washing machine+ water pump+ 2 Fans+ 4 lights	Mix your consumption as per your choice upto 1600w*

*T&C apply

TAG BHARAT TECHNICAL DATA

Parameter		2.2kW-SPC
PV Input		
Min. Input Voltage	[VDC]	350
Max. Input Voltage	[VDC]	420
Max. Input Current	[A]	10
Motor Output		
Output, Phase		1 Phase
Output Voltage	[AC]	0-220
Output Frequency	[Hz]	0-50
Output Current	[A]	0 to 11
Motor Types	HP	UP TO 2HP*
Protection		Short Ckt, Over Load, Low Power
Other Load Output		
Output, Phase		1 Phase
Output Voltage	[AC]	220
Output Frequency	[Hz]	50
Output Current	[A]	0 to 9
Power Factor Range		0.8 to 1
Protection		Short Ckt, Over Load, Low Power
Display & Communication		
Display Type		16 x 2 LCD
Status Indicator		ON, OFF, Fault with appropriate Message
Serial Communication		NA
Remote Monitoring		NA
Other Info		
Max. Ambient Temperature	[°C]	60
Max. Relative Humidity	[%]	80
IP Degree of protection		IP54
Altitude	[M]	NA
Weight	[kg]	6
Size (H)	mm	260
Size (W)	mm	270
Size (D)	mm	160

Technology by:
KINETICA SOLAR

OUR FEATURES*

- Saving on power bills / No Power cut.
- Cost effective, noiseless and better than diesel generators
- Real time power availability in day time.
- Technology works without grid sensitivity and storage .
- No maintenance. ● Easy to install.